



BR-6104KP

## Broadband Router with Print Server 1 WAN Port + 4 Port Switch + 2 USB Ports

### IP Sharing

The NAT/NAPT function lets you share the ADSL line to all the Intranet users (support up to 253 users). It also provides virtual server and virtual DMZ functions to let your internal servers be accessed from the Internet.

### Print Server

The print server function can let you share the printer to all PCs through the network. It supports LPR and IPP printing methods.

### Supports Special Applications

The router can let you setup trigger ports of special applications, and let you utilize Internet services smoothly.

### Anti-DoS SPI Firewall

The SPI (Stateful Packet Inspection) firewall can protect your Intranet PCs from illegal access and many kinds of DoS attacks from the Internet, and alert you by e-mail in the first time if some event happens. It also provides Internet access control function.

### Virtual Server and DMZ

The virtual server and DMZ function let you setup your servers in the Intranet and still can provide services to the Internet users.

### UPnP

UPnP let you configure Internet connection easily and use special Internet applications more smoothly.


### DHCP

Automatically assign IPs to the Intranet PCs.

### Web Configuration

You can configure the router through the friendly Web user interface with a browser.



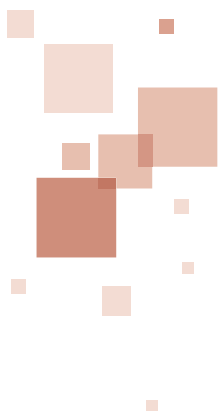

## Features

- NAT/NAPT IP Sharing
- Obtains WAN IP by PPPoE/Static IP/PPTP/DHCP/L2TP
- Print Server for USB Printers (LPR/IPP)
- SPI Anti-DoS Firewall, Virtual Server, Virtual DMZ
- Supports UPnP
- Supports DDNS (DynDNS/TZO)
- Supports Special Applications (Port Triggers)
- VPN Pass Through (IPSec/PPTP/L2TP) DHCP Server
- Bridge Mode Between WAN and LAN
- Web User Interface (Remote Configuration)
- System Status (Port Connectivity, DHCP MAC/IP Mapping)
- Security Log
- Firmware Upgrade

## Specification

Product	BR-6104KP
CPU	ADMtek 5120P (170MHz MIPS R4000)
Flash	2 MB NOR Flash
RAM	16 MB SDRAM
Throughput	54 Mbps
WAN Port	10/100M UTP Port x 1
LAN Ports	10/100M UTP Port x 4
Printer Port	USB 1.1 x 2
Weight	270g
Power	12V DC, 0.5A Linear Power Adaptor
Dimension	30(H)*187(W)*100(D) mm
Temperature	10~40 °C
Humidity	10~90% (Non-Condensing)
Certification	FCC Class B, CE Mark, C-Tick

### Edimax Worldwide

Taiwan/Headquarters  
Edimax Technology Co., Ltd.  
TEL : 886-2-22995648  
FAX : 886-2-22995647  
E-mail : service@edimax.com.tw

China  
Beijing Edimax Science  
& Technology Co., Ltd.  
TEL : 8610-82665568  
FAX : 8610-82665325  
E-mail : support@edimax.com.cn

USA  
Edimax Computer Company  
TEL : 1-408-496-1105  
FAX : 1-408-980-1530  
E-mail : support@edimax.com

Latin America  
Edimax Latin America  
TEL : 1-786-845 8099  
FAX : 1-786-331 8490  
E-mail : sales\_latinamerica@edimax.com

Europe  
Edimax Technology Europe B.V.  
TEL : 31-499-377344  
FAX : 31-499-372647  
E-mail : support-europe@edimax.com.tw

U.K.  
Edimax Technology (UK) Ltd.  
TEL : +44-(0)-1908-255881  
FAX : +44-(0)-1908-255700  
E-mail : support-uk@edimax.com.tw

